



EZ1 series Wi-Fi Version for DIY

- One microinverter connects to two modules
- Max output power reaching 600/799VA
- Two input channels with independent MPPT
- High Input current to adapter to large modules
- Maximum reliability, IP67
- Built in Wi-Fi and Bluetooth
- Safety protection relay integrated
- Dedicated for balcony and DIY systems


PRODUCT FEATURES

The Wi-Fi version of EZ1 series are APsystems 3rd generation of dual microinverters, they are dedicated designed for balcony and DIY systems, EZ1 series micorinverters have 2 input channels with independent MPPT and high input current and output power to adapt to today's larger power module.

Users could directly connect to the EZ1 series with their cell phones through Bluetooth and get the real-time data of the solar systems. Besides direct connection, EZ1 series could also connect to a router through Wi-Fi and send data to cloud servers for remote monitoring.

Through an AC extension cable provided by APsystems, EZ1 series could be plugged into a socket and start output energy, truly easy and convenient grid connection.

EZ1 series Application Figure

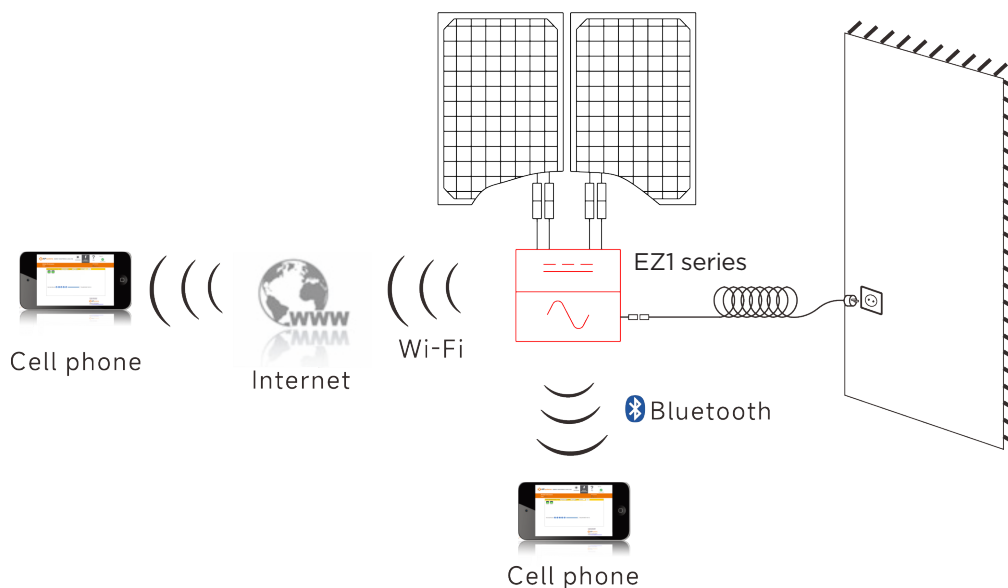

Datasheet | EZ1 Microinverter Series

Model	EZ1-S	EZ1-M
Region	EMEA	
Input Data (DC)		
Recommended PV Module Power (STC) Range	255Wp-550Wp+	300Wp-730Wp+
Peak Power Tracking Voltage	28V-45V	
Operating Voltage Range	16V-60V	
Maximum Input Voltage	60V	
Maximum Input Current	18A x 2	20A x 2
Isc PV	22.5A x 2	25A x 2

Output Data (AC)

Maximum Continuous Output Power	600VA	799VA
Nominal Output Voltage/Range ⁽¹⁾	230V/184V-253V	
Nominal Output Current	2.6A	3.5A
Nominal Output Frequency/ Range ⁽¹⁾	50Hz/48Hz-51Hz	
Default Power Factor	0.99	

Efficiency

Peak Efficiency	97.3%
Nominal MPPT Efficiency	99.5%
Night Power Consumption	20mW

Mechanical Data

Operating Ambient Temperature Range ⁽²⁾	- 40 °C to + 65 °C
Storage Temperature Range	- 40 °C to + 85 °C
Dimensions (W x H x D)	263mm x 218mm x 41.2mm
Weight	2.7kg
DC Connector Type	Stäubli MC4 PV-ADBP4-S2&ADSP4-S2
Cooling	Natural Convection - No Fans
Enclosure Environmental Rating	IP67

AC Extension Cable

Wire Size	1.5mm ²
Cable Length	5M as default
Plug Type	Schuko

Features

Communication	Built-in Wi-Fi
Isolation Design	High Frequency Transformers, Galvanically Isolated
Energy Management	APP or Energy Management Analysis (EMA) system
Warranty	12 Years Standard

Compliances

Safety, EMC & Grid Compliances	EN 62109-1/-2; EN 61000-6-1/-2/-3/-4; VDE-AR-N 4105
--------------------------------	---

⁽¹⁾Nominal voltage/frequency range can be extended beyond nominal if required by the utility.
⁽²⁾The inverter may enter to power de-grade mode under poor ventilation and heat dissipation installation environment.



© All Rights Reserved
Specifications subject to change without notice please ensure you are using the most recent update found at web : emea.APsystems.com

European offices

APsystems

Karspeldreef 8, 1101 CJ, Amsterdam, The Netherlands
Email : emea@apsystems.com

APsystems

22 Avenue Lionel Terray 69330 Jonage France
Email : emea@apsystems.com